


PLAN KEYNOTES (BY DIVISION)


- DIVISION 03 - CONCRETE**  
 03-01 RAISE FLOOR OF ROOM TO MATCH CORRIDOR LANDING ELEVATION (APPROXIMATELY 5 3/8" ABOVE EXISTING SECOND FLOOR) WITH STANDARD WEIGHT CONCRETE.  
 03-02 TOP OF SHOWER FLOOR DRAIN + 3/8" BELOW ADJACENT FINISHED FLOOR SLOPE CONCRETE FLOOR IN SHOWER TO DRAIN (1:50 SLOPE MAXIMUM).
- DIVISION 04 - MASONRY**  
 04-01 NEW 8" CMU ENCLOSURE AROUND NEW DIVISION 23 PIPING.  
 04-02 REPLACE 8" CMU AFTER MEP WORK UNDER LANDING IS COMPLETE (1 HR MIN).
- DIVISION 05 - METALS**  
 05-01 STEEL LADDER PER SPEC SECTION 055000. SPANS FROM SECOND OR THIRD FLOOR TO 3'-0" ABOVE THE MEZZANINE LEVEL ABOVE.  
 05-02 AT LOCATIONS IN CHASE THAT PROVIDE LESS THAN 18" CLEAR WIDTH, PROTECT STRUCTURAL FRAME FIREPROOFING BETWEEN 24" AND 54" ABOVE FLOOR WITH 26 GA BREAK METAL.
- DIVISION 08 - OPENINGS**  
 08-01 NEW INSULATED ALUMINUM COILING DOOR. BOTH DOOR AND HOUSING CAPABLE OF RESISTING THE PASSAGE OF SMOKE. DOOR TO LOWER UPON ACTIVATION OF BUILDING FIRE SUPPRESSION SYSTEM OR FIRE ALARM.  
 08-02 NEW DETENTION ALUMINUM WINDOWS.  
 08-03 NEW INSULATED ALUMINUM CURTAIN WALL SYSTEM.  
 08-04 WALL AND OPENINGS ADJACENT TO BRIDGE TO RESIST THE PASSAGE OF SMOKE PER IRC SECTION 3104.5 EXCEPTION 1.  
 08-05 NEW HOLLOW METAL DOOR AND FRAME.  
 08-06 POWER DOOR PUSH BUTTON ACTUATOR.  
 08-07 WALL MOUNT ACCESS PANEL. SIZE IN INCHES SPECIFIED NEXT TO KEYNOTE.
- DIVISION 09 - FINISHES**  
 09-02 PAINT AND WALL BASE. SEE FINISH SCHEDULE.  
 09-03 PATCH AND REPAIR WALL AND FLOOR.  
 09-04 INFILL WALL AND PREP FOR NEW DOOR AND FRAME.  
 09-05 NEW CMU WALLS AND RESINOUS EPOXY FINISH ON FLOORS AND WALLS OF SHOWERS. COORDINATE WITH PLUMBING SCOPE OF WORK. DELETE BY BID ALTERNATE 6.  
 09-06 PHOTO LUMINESCENT EGRESS ARROWS CONTINUED ON OUTSIDE WALL OF STAIR LEADING TO ENTRY FLOOR.  
 09-07 PHOTO LUMINESCENT EGRESS ARROWS CONTINUED ON OUTSIDE WALL OF STAIR LEADING TO FIRST FLOOR.
- DIVISION 12 - FURNISHINGS**  
 12-01 72" L x 18" D x 18" H, POWDER COAT, 12 GA. STEEL BENCH WITH CUFF RING BOLTED TO FLOOR.  
 12-02 96" L x 18" D x 18" H, POWDER COAT, 12 GA. STEEL BENCH WITH CUFF RING BOLTED TO FLOOR.
- NOTE:**  
 NOT ALL KEYNOTES APPLY TO EVERY SHEET.

SEE SHEET A1.0.1 FOR TYPICAL PLAN GENERAL NOTES

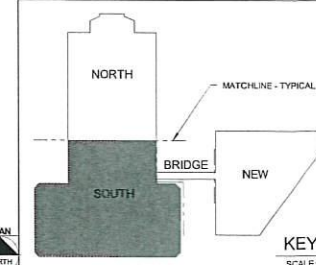

KEY PLAN  
 SCALE: NO SCALE


1 FIRST FLOOR PLAN REMODEL-SOUTH  
 Scale: 1/8" = 1'-0"

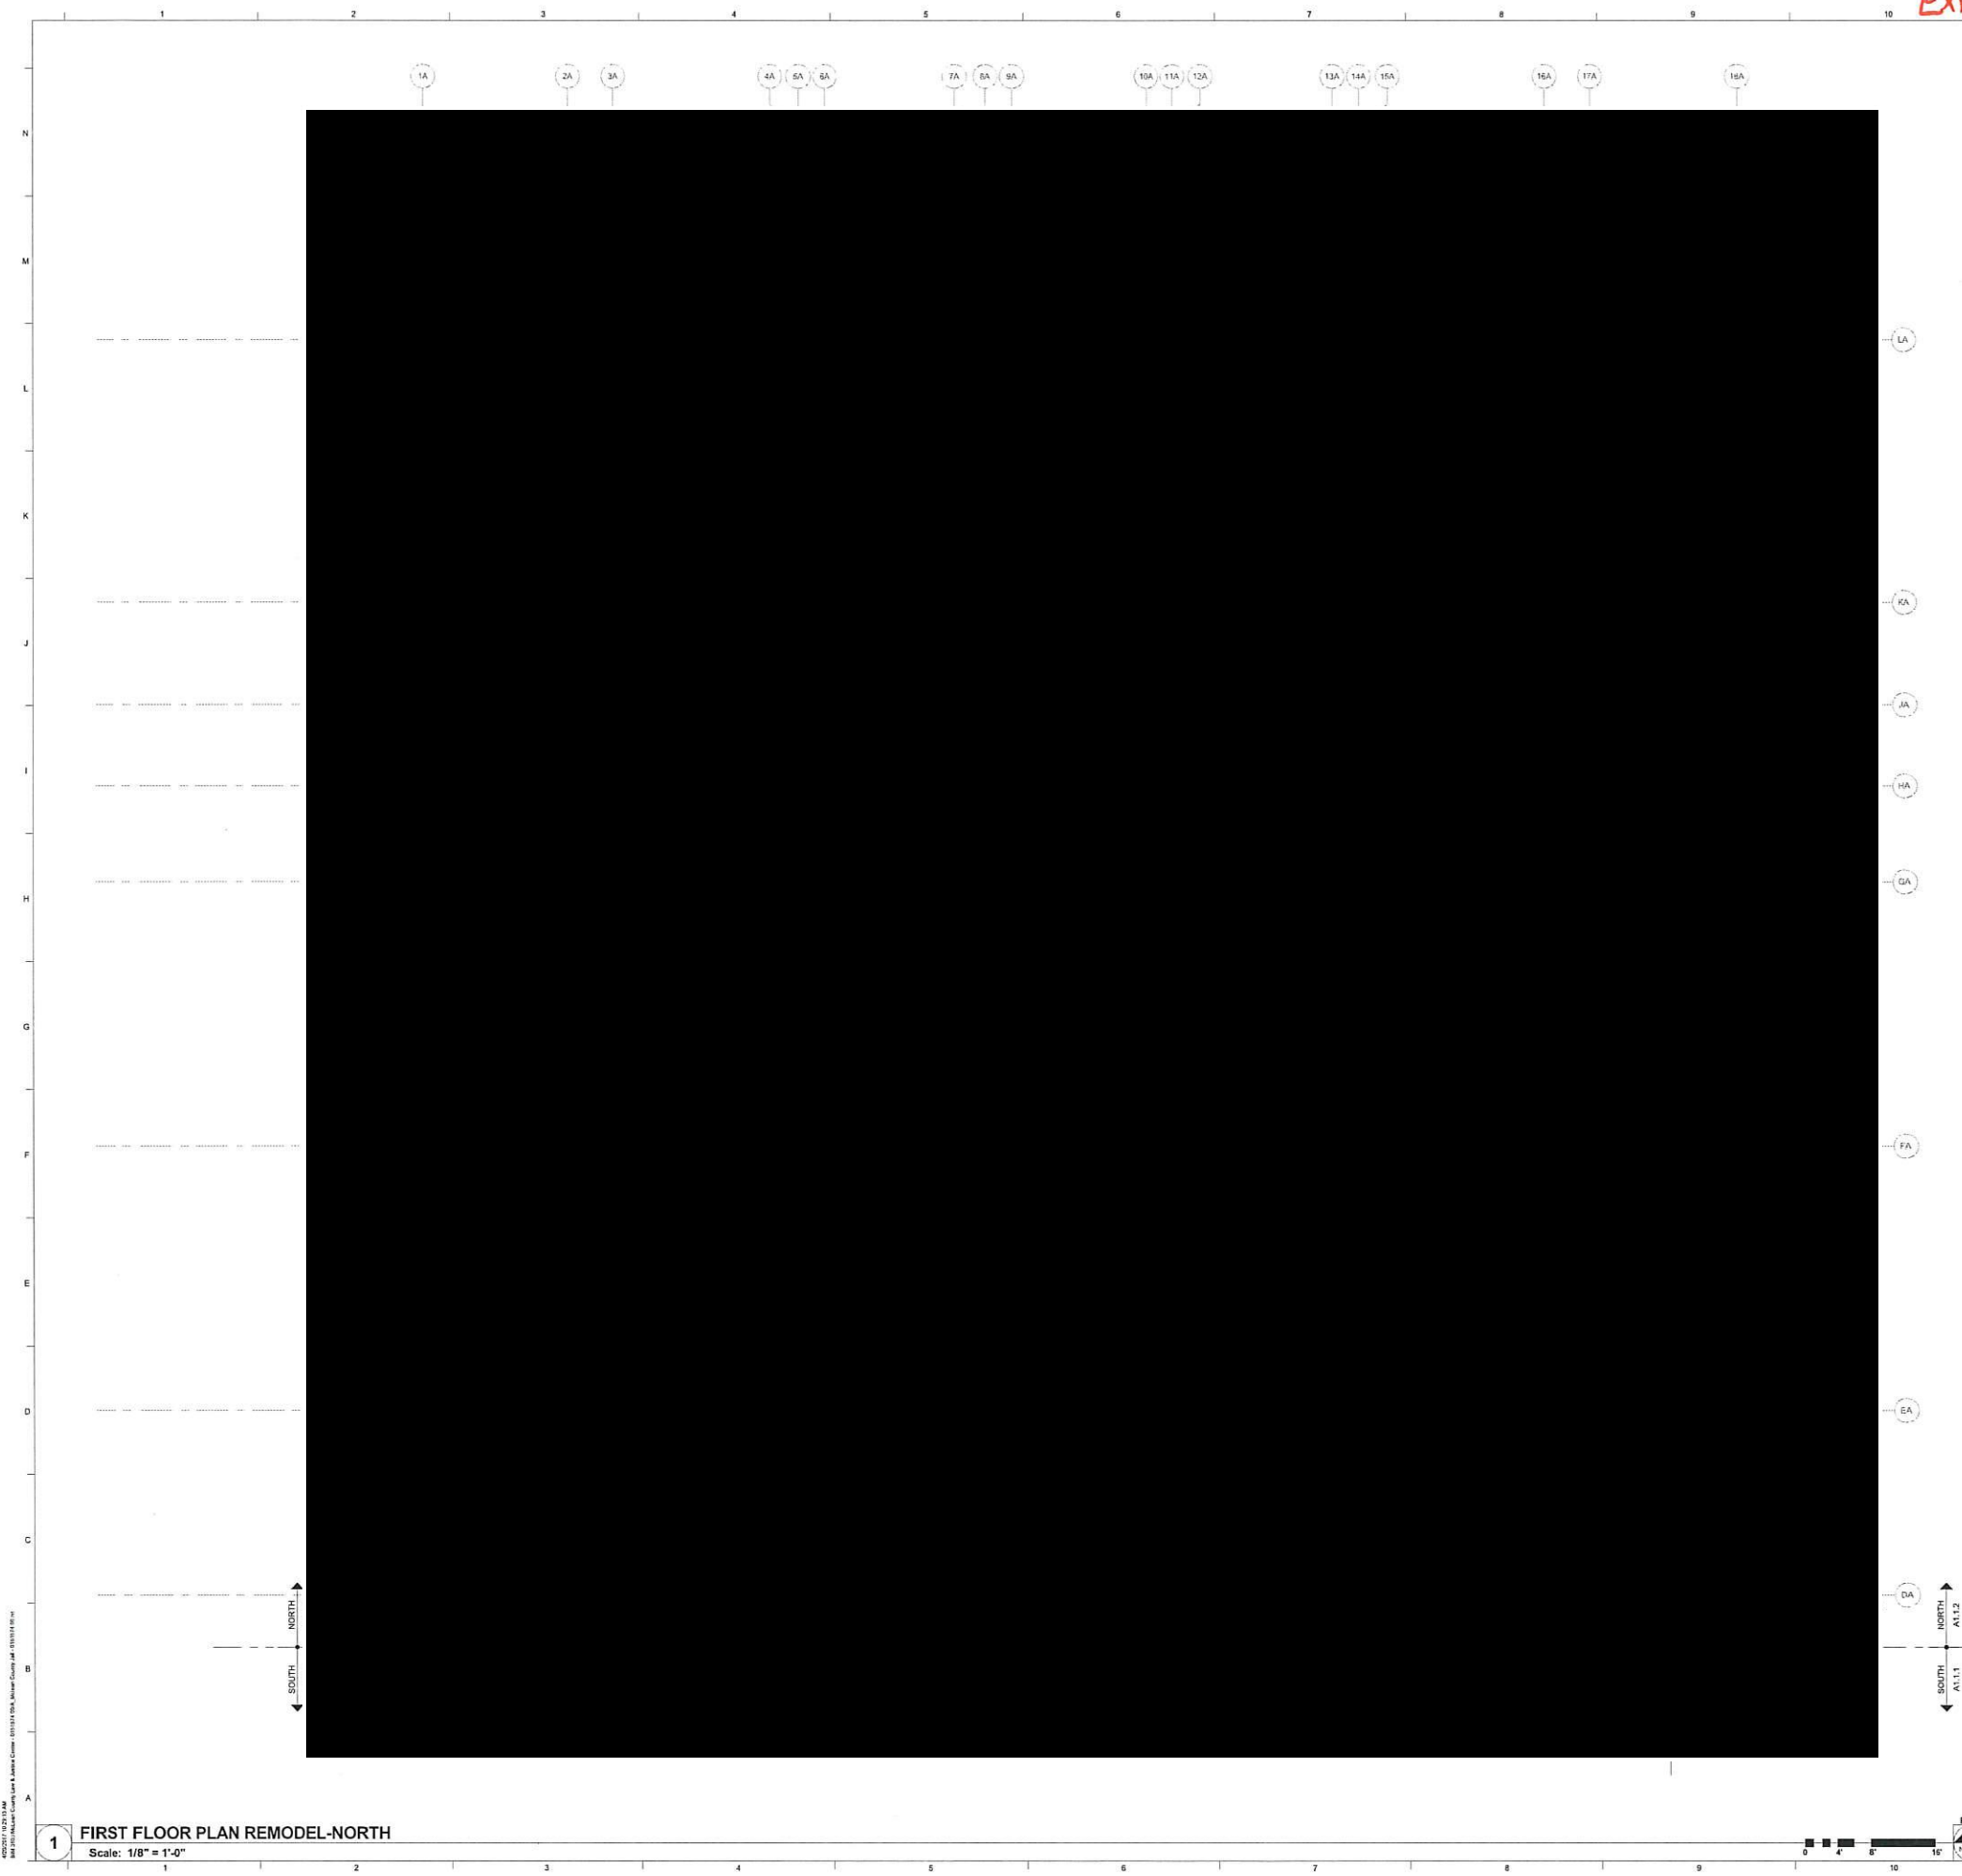


PLAN KEYNOTES (BY DIVISION)

- DIVISION 03 - CONCRETE**  
03-01 RAISE FLOOR OF ROOM TO MATCH CORRIDOR LANDING ELEVATION (APPROXIMATELY 5 3/8" ABOVE EXISTING SECOND FLOOR) WITH STANDARD WEIGHT CONCRETE.  
03-02 TOP OF SHOWER FLOOR DRAIN + 3/8" BELOW ADJACENT FINISHED FLOOR SLOPE CONCRETE FLOOR IN SHOWER TO DRAIN (1:50 SLOPE MAXIMUM).
- DIVISION 04 - MASONRY**  
04-01 NEW 8" CMU ENCLOSURE AROUND NEW DIVISION 23 PIPING.  
04-02 REPLACE 8" CMU AFTER MEP WORK UNDER LANDING IS COMPLETE (1 HR MIN).
- DIVISION 05 - METALS**  
05-01 STEEL LADDER PER SPEC SECTION 055900. SPANS FROM SECOND OR THIRD FLOOR TO 3'-0" ABOVE THE MEZZANINE LEVEL ABOVE.  
05-02 AT LOCATIONS IN CHASE THAT PROVIDE LESS THAN 16" CLEAR WIDTH, PROTECT STRUCTURAL FRAME FIREPROOFING BETWEEN 24" AND 54" ABOVE FLOOR WITH 25 GA BREAK METAL.
- DIVISION 08 - OPENINGS**  
08-01 NEW INSULATED, ALUMINUM CEILING DOOR, BOTH DOOR AND HOUSING CAPABLE OF RESISTING THE PASSAGE OF SMOKE. DOOR TO LOWER UPON ACTIVATION OF BUILDING FIRE SUPPRESSION SYSTEM OR FIRE ALARM.  
08-02 NEW DETENTION ALUMINUM WINDOWS.  
08-03 NEW INSULATED ALUMINUM CURTAIN WALL SYSTEM.  
08-04 WALL AND OPENINGS ADJACENT TO BRIDGE TO RESIST THE PASSAGE OF SMOKE PER IBC SECTION 7104.5 EXCEPTION 1.  
08-05 NEW HOLLOW METAL DOOR AND FRAME.  
08-06 POWER DOOR PUSH BUTTON ACTUATOR.  
08-07 WALL MOUNT ACCESS PANEL. SIZE IN INCHES SPECIFIED NEXT TO KEYNOTE.
- DIVISION 09 - FINISHES**  
09-02 PAINT AND WALL BASE. SEE FINISH SCHEDULE.  
09-03 PATCH AND REPAIR WALL AND FLOOR.  
09-04 INFILL WALL AND PREP FOR NEW DOOR AND FRAME.  
09-05 NEW CMU WALLS AND RESINOUS EPOXY FINISH ON FLOORS AND WALLS OF SHOWERS. COORDINATE WITH PLUMBING SCOPE OF WORK. DELETE BY BID ALTERNATE 6.  
09-06 PHOTOLUMINESCENT EGRESS ARROWS CONTINUED ON OUTSIDE WALL OF STAIR LEADING TO ENTRY FLOOR.  
09-07 PHOTOLUMINESCENT EGRESS ARROWS CONTINUED ON OUTSIDE WALL OF STAIR LEADING TO FIRST FLOOR.
- DIVISION 12 - FURNISHINGS**  
12-01 72"L x 18"D x 18"H, POWDER COAT, 12 GA. STEEL BENCH WITH CUFF RING; BOLTED TO FLOOR.  
12-02 90"L x 18"D x 18"H, POWDER COAT, 12 GA. STEEL BENCH WITH CUFF RING; BOLTED TO FLOOR.
- NOTE:**  
NOT ALL KEYNOTES APPLY TO EVERY SHEET.

SEE SHEET A1.0.1 FOR TYPICAL PLAN GENERAL NOTES

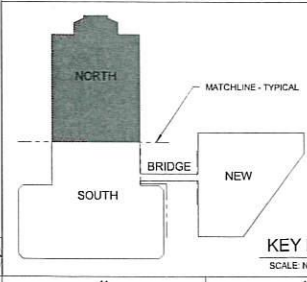

KEY PLAN  
SCALE: NO SCALE

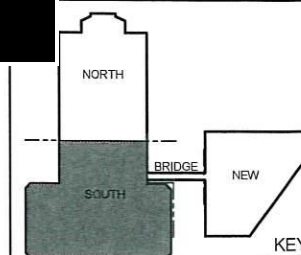

KEY PLAN  
SCALE: NO SCALE



**Limited Access and Secured Areas:**

ENTRY CONTROL

Restrict entrance of persons and vehicles [REDACTED]

Allow entrance only to authorized persons with [REDACTED]

Maintain log of workers and visitors, make available to Owner on request.

[REDACTED]

[REDACTED]

[REDACTED]

PERSONNEL IDENTIFICATION

[REDACTED]

[REDACTED]

Badge to Include [REDACTED]

Maintain a list of accredited persons, submit a copy to Owner on request.

[REDACTED]

PERSONNEL SECURITY REQUIREMENTS

The Contractor shall require all employees working within the secure area to:

Identification-Based History Records Information Check (also referred to as a “background check or investigation”) are required of all Contractor’s employees or agents of the Contractor having any potential for access to the Project site.

The Contractor shall cause their employee or agent to obtain a background check. The McLean County Sheriff’s Department will provide background check services for employees and agents of the Contractor according to the following procedures:

The Contractor notifies the COUNTY of all applicants requiring background checks.

The Contractor submits a background check release letter and legible copy of employee or agent State issued identification card.

The COUNTY shall review the background check reports to determine eligibility of employees or agents of the Contractor to work on the Project site. Review by the COUNTY will also include any convictions of felony crimes.

The Contractor shall await the COUNTY’s background check review and notification of Approval by the COUNTY of said employee or agent BEFORE sending any said employee or agent to the Project site.

#### **Exhibit #4**

The COUNTY will receive notification of changes to an employee's or agent's background status, throughout the duration of the Project. The COUNTY shall notify the Contractor should any of the Contractor's employees or agents subsequently be discovered to be ineligible to work on the Project site. The Contractor shall then cease to send said employee or agent to work on the Project site for the duration of the Project.

The COUNTY shall provide a copy of the background check report to the Contractor's individual employee or agent. Copies of an employee's or agent's background check reports shall not be released to the Contractor.

**SPECIAL PROVISION FOR WAGES OF EMPLOYEES ON PUBLIC WORKS**

1.      Prevailing Wages. All wages paid by the Contractor and each subcontractor shall be in compliance with The Prevailing Wage Act (820 ILCS 130), as amended, except where a prevailing wage violates a federal law, order, or ruling, the rate conforming to the federal law, order, or ruling shall govern. The Illinois Department of Labor publishes the prevailing wage rates on its website. If the Illinois Department of Labor revises the prevailing wage rates, the revised prevailing wage rates on the Illinois Department of Labor's website shall apply to this contract and the Contractor will not be allowed additional compensation on account of said revisions. The Contractor shall review the wage rates applicable to the work of the contract at regular intervals in order to ensure the timely payment of current wage rates. The Contractor agrees that no additional notice is required. The Contractor shall be responsible to notify each subcontractor of the wage rates set forth in this contract and any revisions thereto.

2.      Payroll Records. The Contractor and each subcontractor shall make and keep, for a period of not less than five years from the date of the last payment on a contract or subcontract, records of all laborers, mechanics, and other workers employed by them on the project; the records shall include information required by 820 ILCS 130/5 for each worker. Upon seven business days' notice, the Contractor and each subcontractor shall make available for inspection and copying at a location within this State during reasonable hours, the payroll records to the public body in charge of the project, its officers and agents, the Director of Labor and his deputies and agents, and to federal, State, or local law enforcement agencies and prosecutors.

3.      Submission of Payroll Records. The Contractor and each subcontractor shall, no later than the 15<sup>th</sup> day of each calendar month, file a certified payroll for the immediately preceding month with the public body in charge of the project, except that the full social security number and home address shall not be included in weekly transmittals. Instead the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). The certified payroll shall consist of a complete copy of the payroll records, except starting and ending times of work each day may be omitted.

The certified payroll shall be accompanied by a statement signed by the Contractor or subcontractor or an officer, employee, or agent of the Contractor or subcontractor which avers that: (i) he or she has examined the certified payroll records required to be submitted by the Act and such records are true and accurate; (ii) the hourly rate paid to each worker is not less than the general prevailing rate of hourly wages required; and (iii) the Contractor or subcontractor is aware that filing a certified payroll that he or she knows to be false is a Class A misdemeanor.

4.      Employee Interviews. The Contractor and each subcontractor shall permit his/her employees to be interviewed on the job, during working hours, by compliance investigators of the County or the Department of Labor.

██████████ EQUIPMENT TO BE PROVIDED:

- 16 Video Visitation Systems to be installed in DE25 Units detailed in Exhibit 2 (DE25)
- 2 Inmate Telephone Systems to be wall mounted (IMS)
- All necessary switches and ancillary equipment to be installed in Video Visitation Equipment Room (shown in orange)

██████████ EQUIPMENT TO BE PROVIDED:

- 2 Video Visitation Systems to be installed in DE04 Units detailed in Exhibit 2 (DE04)
- 3 Video Visitation Systems to be installed in DE06 Units detailed in Exhibit 2 (DE06)
- 2 Portable Video Visitation Systems to be installed on a portable housing with wheels to be provided by VENDOR
- 5 Video Visitation System wall jacks that the Portable Video Visitation Systems can be plugged into (PUP)
- 4 Inmate Telephone Systems to be installed in DE05 Units detailed in Exhibit 2 (DE05)
- 10 Inmate Telephone Systems to be wall mounted (IMS)
- 8 Inmate Non-Contact Telephone Systems (face-to-face) to be wall mounted (P1)
- All necessary switches and ancillary equipment to be installed in IT Room (shown in orange)


██████████ MEZZANINE EQUIPMENT TO BE PROVIDED:

- 2 Video Visitation Systems to be installed in DE06 Units detailed in Exhibit 2 (DE06)

██████████ EQUIPMENT TO BE PROVIDED:

- 4 Video Visitation Systems to be installed in DE04 Units detailed in Exhibit 2 (DE04)
- 2 Video Visitation Systems to be installed in DE06 Units detailed in Exhibit 2 (DE06)
- 2 Portable Video Visitation Systems to be installed on a portable housing with wheels to be provided by VENDOR
- 4 Video Visitation System wall jacks that the Portable Video Visitation Systems can be plugged into (PUP)
- 8 Inmate Telephone Systems to be installed in DE05 Units detailed in Exhibit 2 (DE05)
- 3 Inmate Telephone Systems to be wall mounted (IMS)
- 8 Inmate Non-Contact Telephone Systems (face-to-face) to be wall mounted (P1)
- All necessary switches and ancillary equipment to be installed in IT Room (shown in orange)



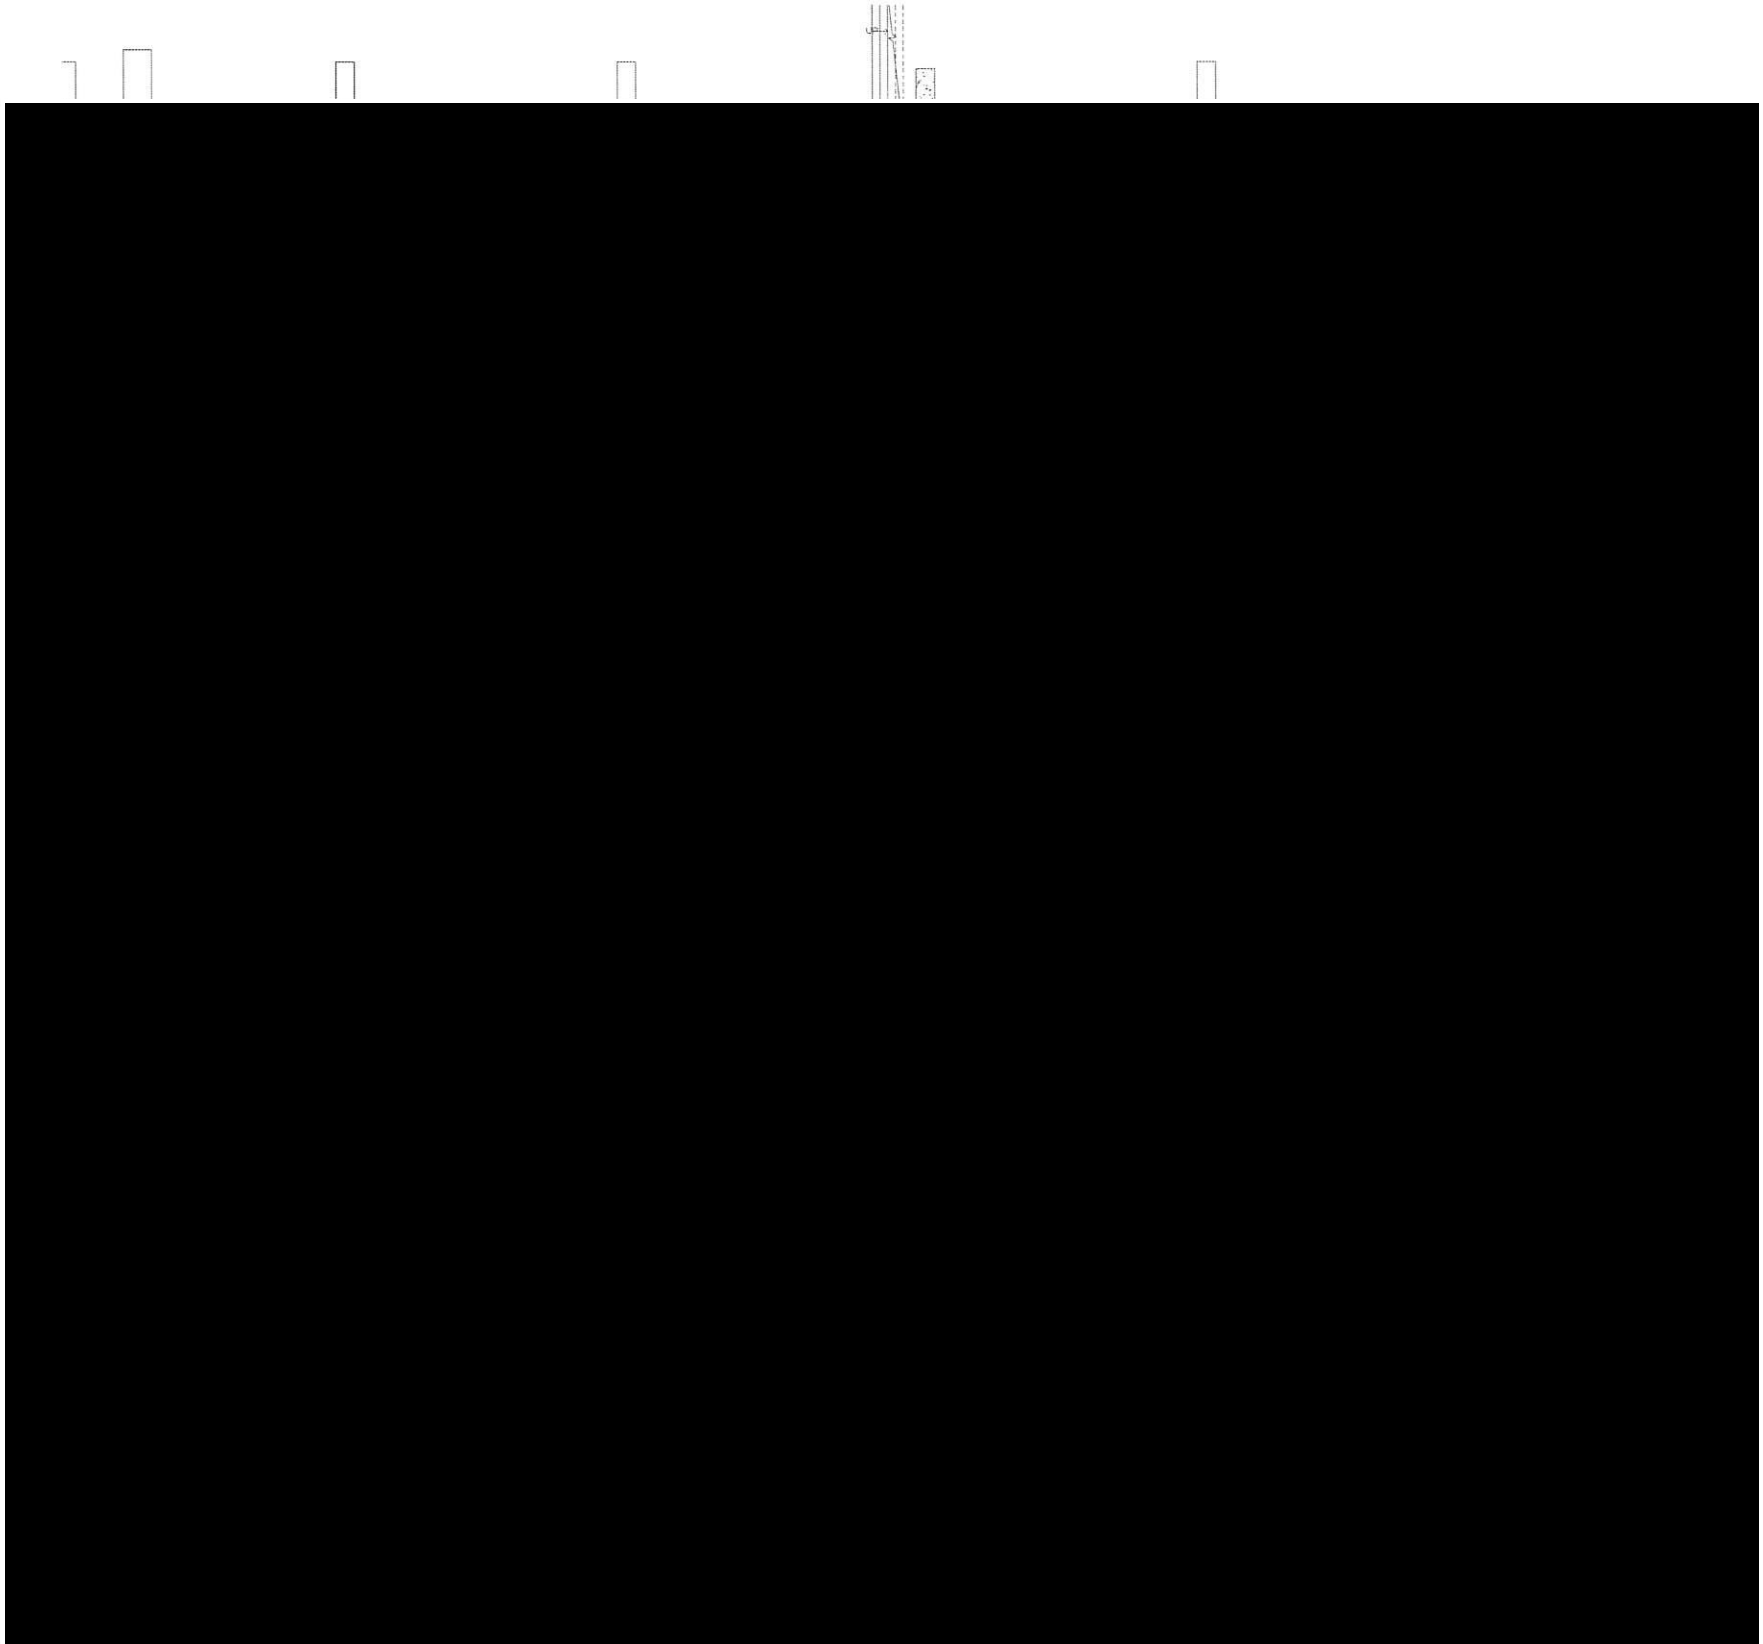

10/20/17 10:15 AM  
C:\Users\jgallagher\OneDrive\Documents\1010171015\1010171015.dwg

**1** FIRST FLOOR PLAN - TELECOMMUNICATIONS  
1/8" = 1'-0"



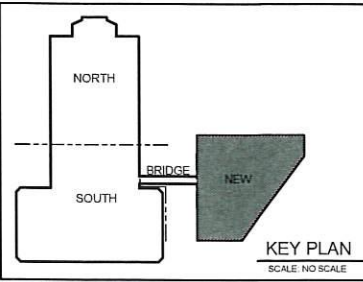



EXHIBIT 1- PAGE 2

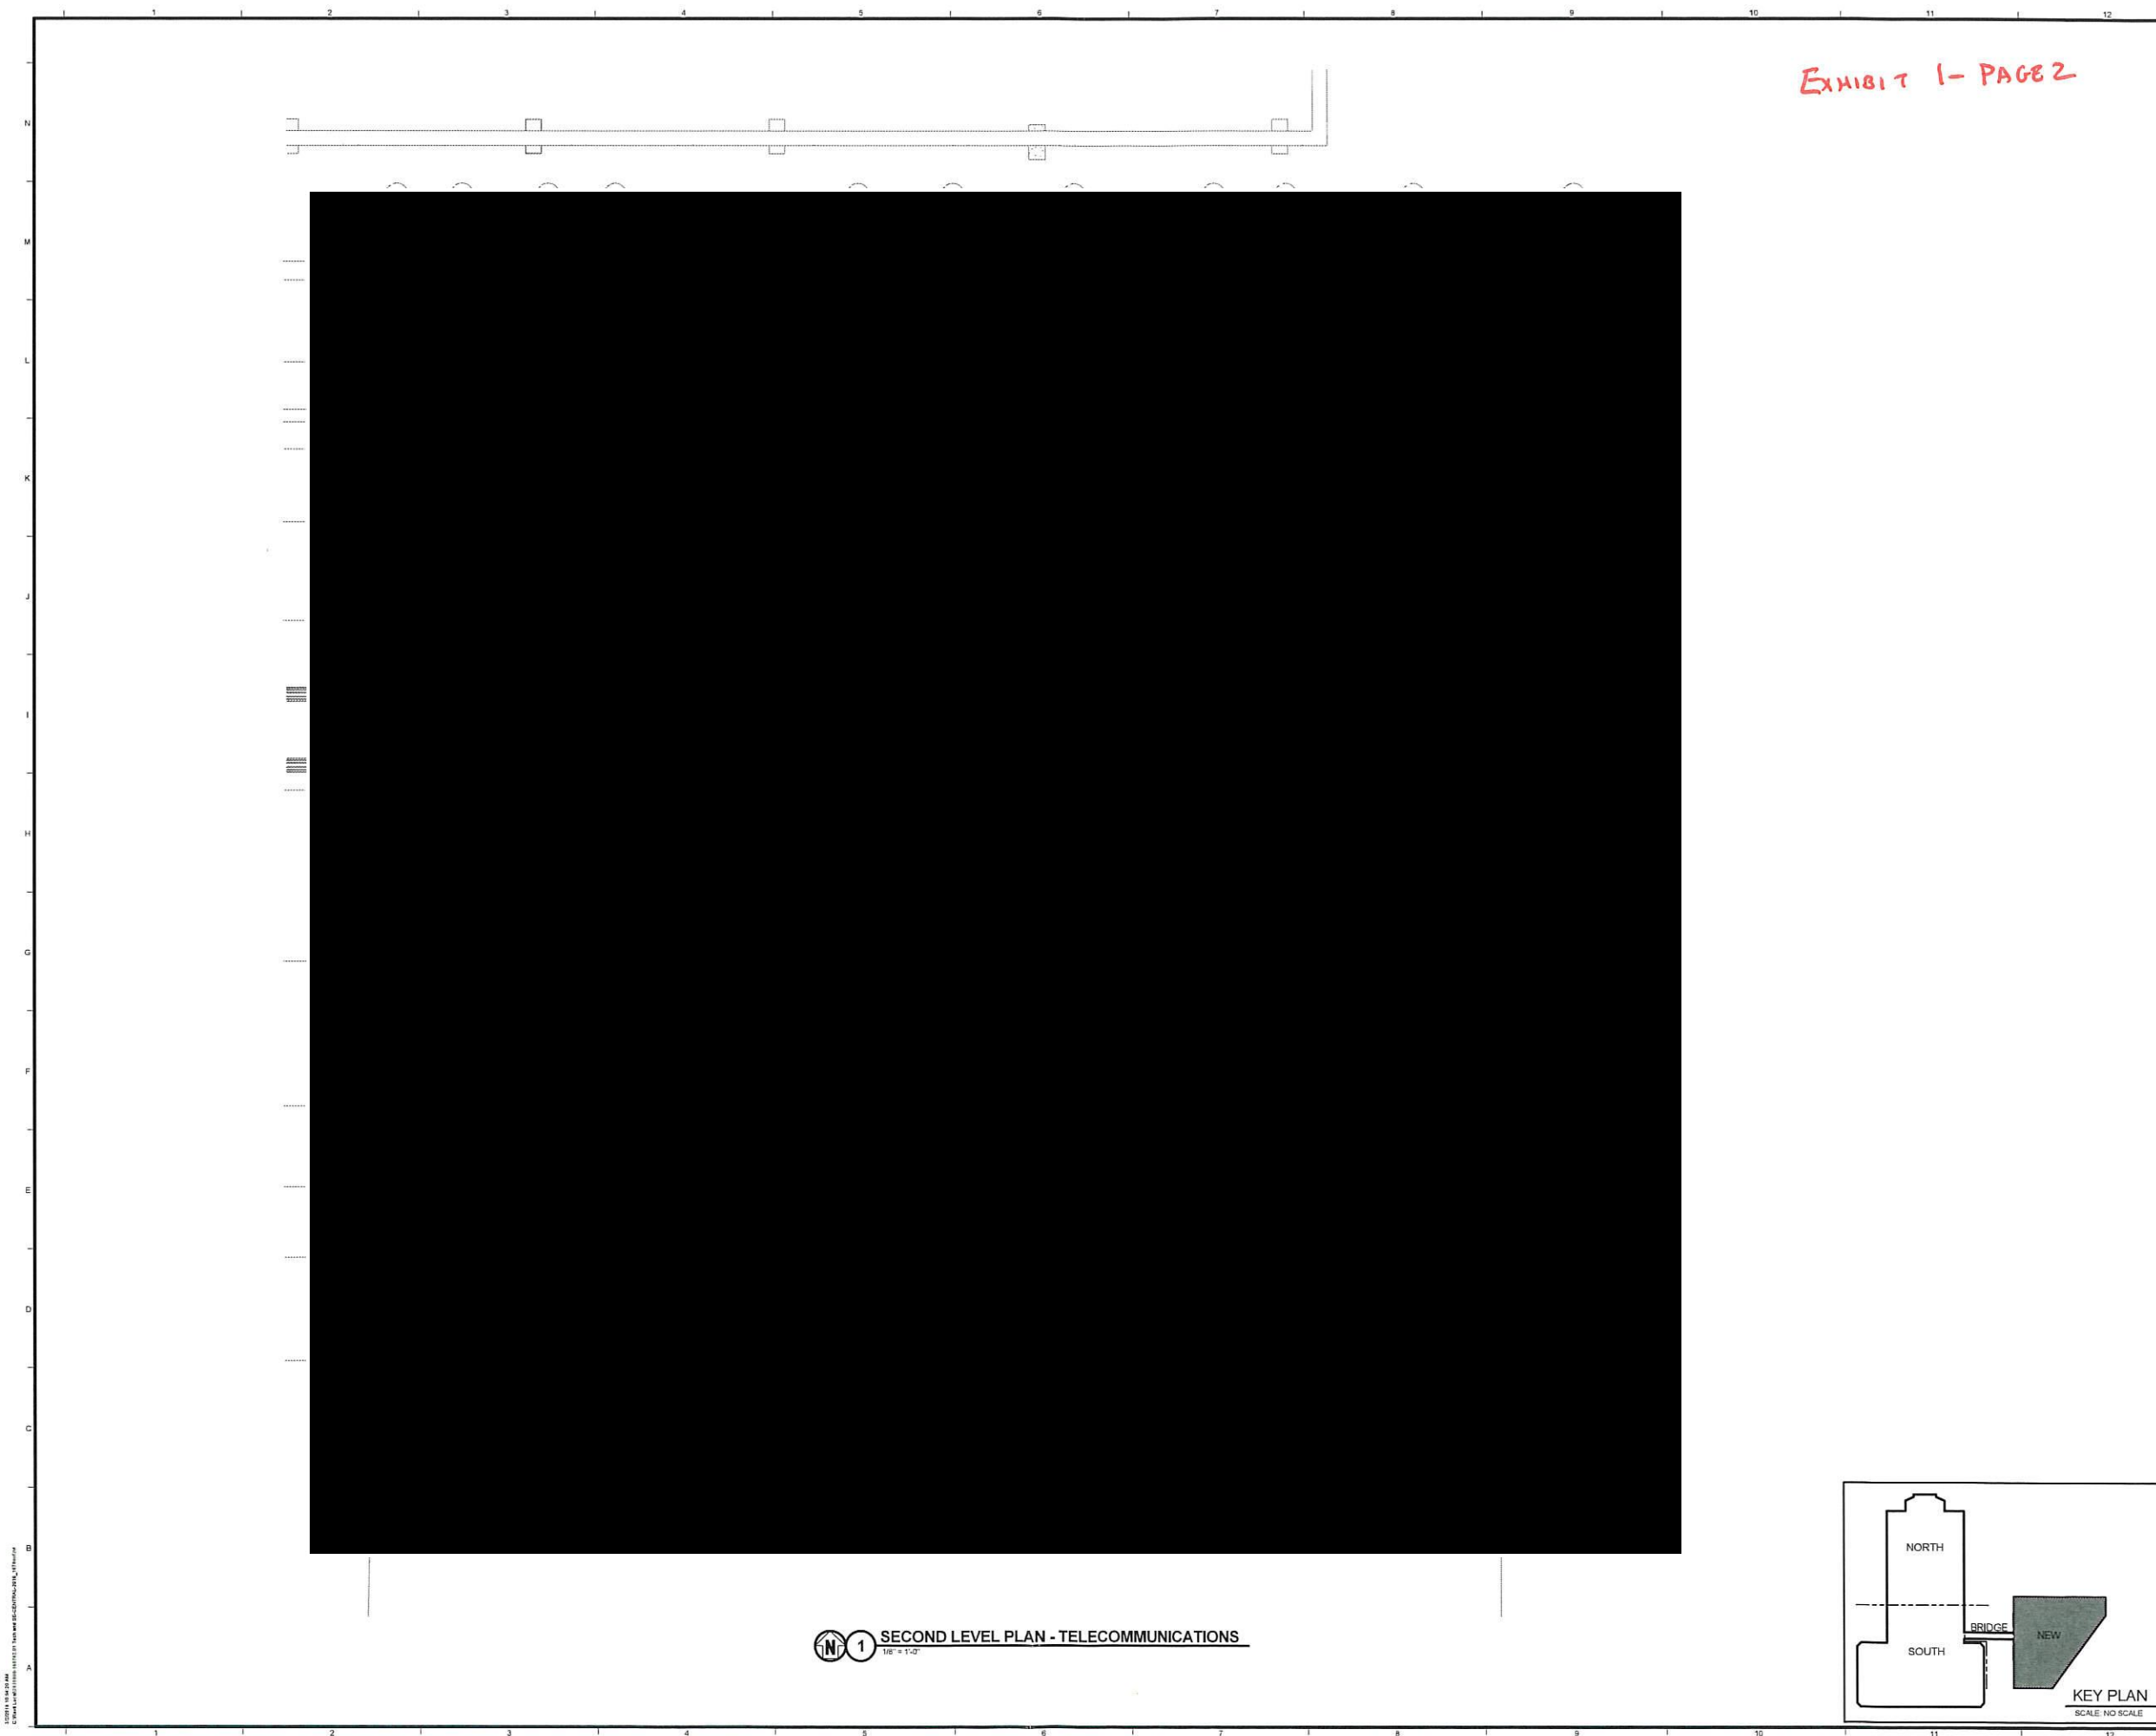


A solid black rectangle with no visible features or text.

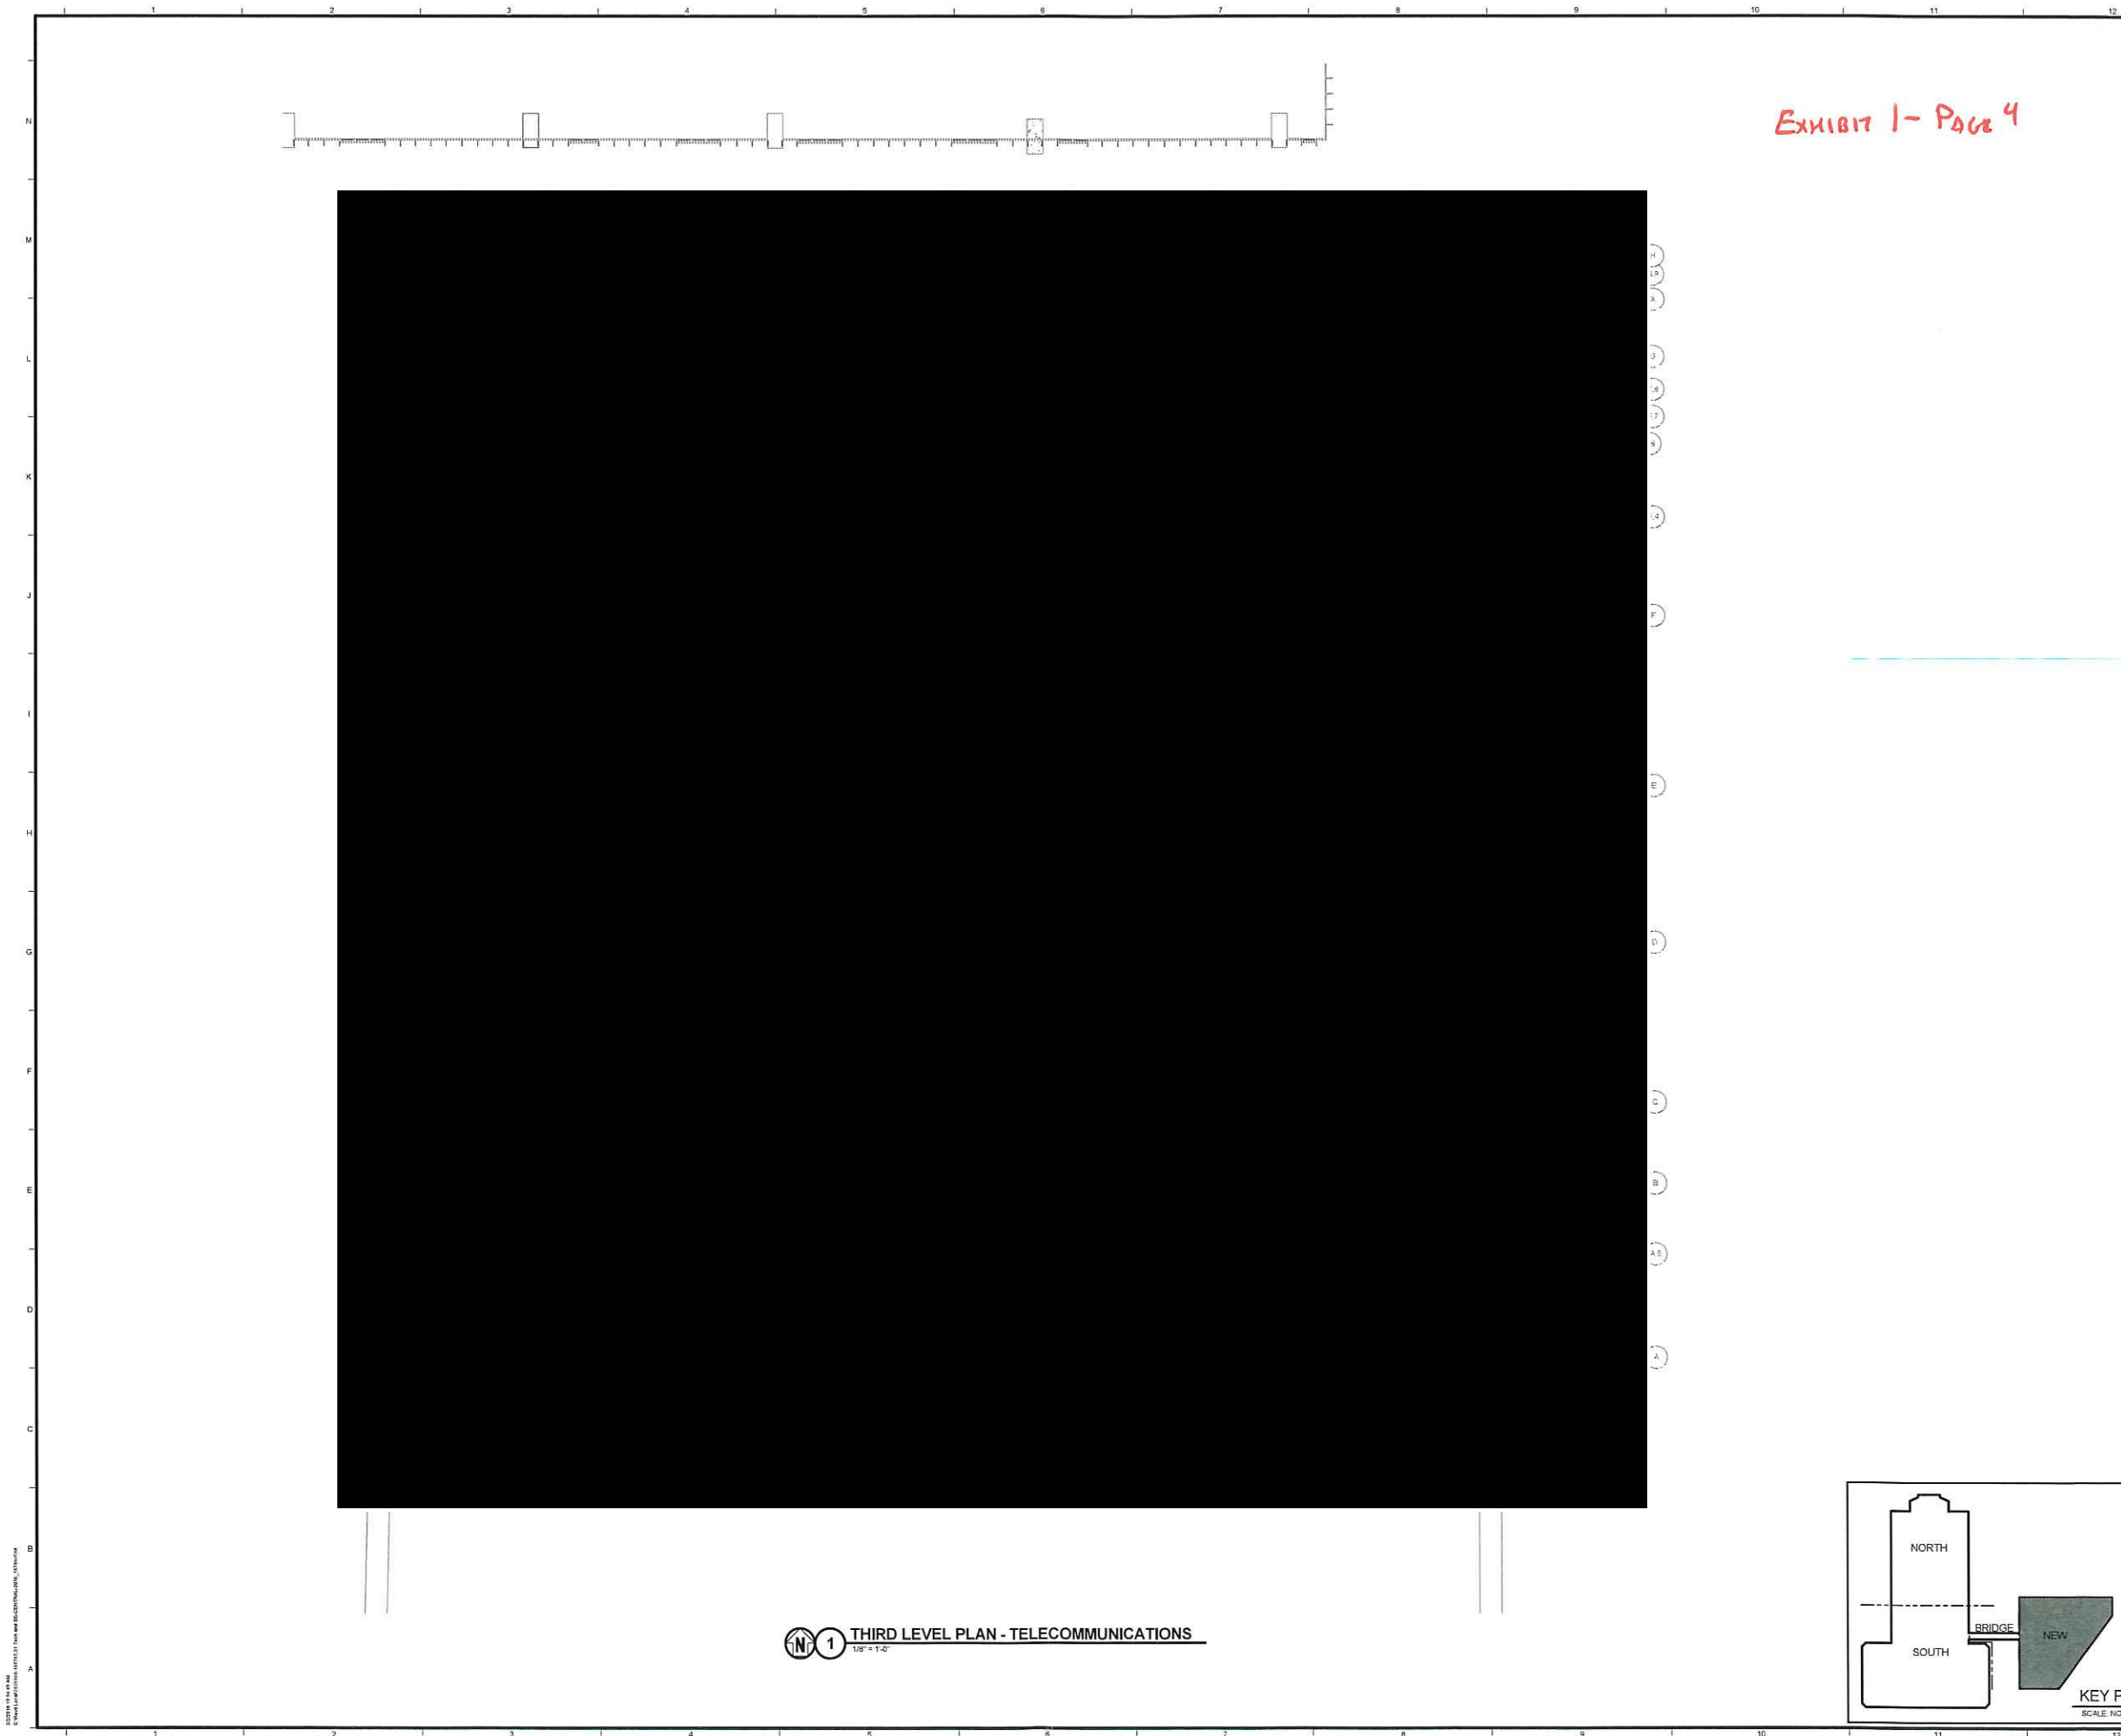

**1** THIRD LEVEL PLAN - TELECOMMUNICATIONS  
1/8" = 1'-0"

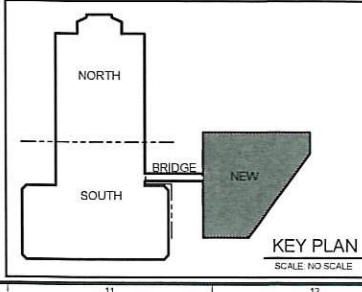


LEGS TO BE METALLIC SILVER

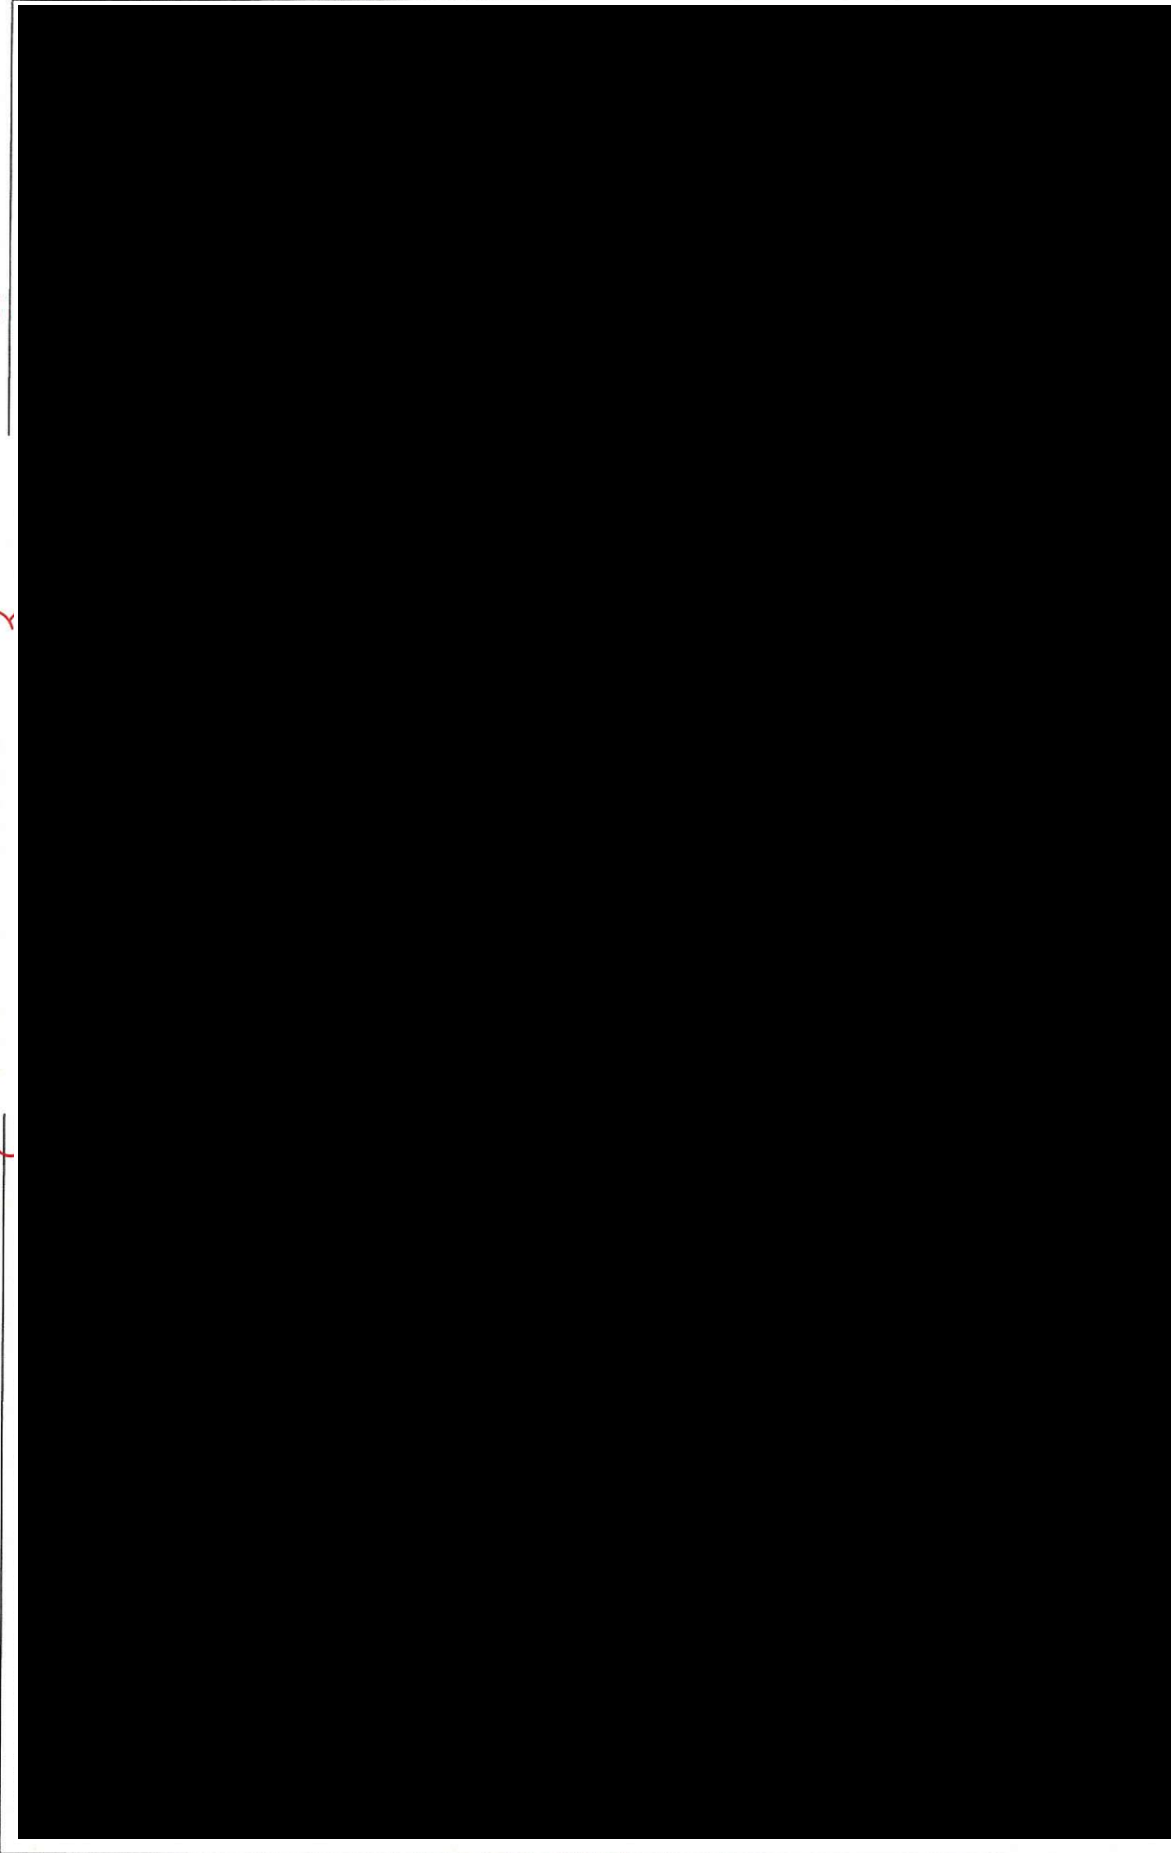

|     |         |                     |     |  |   |   |  |
|-----|---------|---------------------|-----|--|---|---|--|
| REV | DATE    | DESCRIPTION         | DRN | DO NOT SCALE DRAWING   | TOLERANCES  | MATERIALS LIST  | FINISH SPECIFICATIONS  |
| A   | 5/28/13 | RELEASE NEW DRAWING | LT  | THIS IS THE PROPERTY OF NORIX GROUP, INC. IT SHALL NOT BE COPIED, REPRODUCED, OR TRANSMITTED IN ANY MANNER. IT SHALL NOT BE SUBMITTED TO ANY OTHER PARTY WITHOUT THE WRITTEN CONSENT OF NORIX GROUP, INC. IT SHALL BE USED ONLY IN CONNECTION WITH THE WORK UNDER THE PROPOSALS OF PURCHASE ORDER NUMBERED BY NORIX GROUP, INC. COPYRIGHT 2010 | STEEL<br>.XX = ± .125<br>.XXX = ± .060<br>ANGLES = ± 2° | 304SS 12GA (.1046") (BODY)<br>ASTM A1011-CS 12GA (.1046") (FACEPLATE FRAME)<br>304SS 14GA (.0747") (SEAT/FACEPLATE)<br>ASTM A513, TYPE 1, HR, EW, Ø3.0" x 14GA (LEG)<br>POLYCARBONATE SHEET | FINISH SPECIFICATIONS<br>POWDER COAT WHEEL, SILVER (FACEPLATE FRAME)<br>POWDER COAT WHEEL, SILVER (LEG ONLY)<br>PART DESCRIPTION |
|     |         |                     |     | NORIX  |   | WWW.NORIX.COM   | INTELESTION, FLOORMOUNT,<br>FREE STANDING, ENCLOSED,<br>STYLE 304SS  |
|     |         |                     |     | DATE DRAWN   |   | 5/28/2013   | DRAWING NUMBER   |
|     |         |                     |     | DRAWN BY   |   | LT  | SEF7S-SST  |
|     |         |                     |     | DATE DRAWN   |   | 5/28/2013   | DRAWING TYPE   |
|     |         |                     |     | WWW.NORIX.COM  |   |   | CUSTOMER   |
|     |         |                     |     |  |   |   | SHEET  |
|     |         |                     |     |  |   |   | 1 OF 2   |

FOUNDATION DETAIL

1/16 761



THE DIMENSIONS SHOWN ARE FOR REFERENCE ONLY

DE04

| REV | DATE    | DESCRIPTION         | DRN | APRV | DO NOT SCALE DRAWING  | TOLERANCES  | MATERIALS LIST  | FINISH SPECIFICATIONS   |
|-----|---------|---------------------|-----|------|---|---|---|---|
| A   | 5/28/13 | RELEASE NEW DRAWING | LT  | BM   | THIS IS THE PROPERTY OF NORIX GROUP, INC. IT SHALL NOT BE COPIED, REPRODUCED, OR DISTRIBUTED IN ANY MANNER. IT SHALL NOT BE SUBMITTED TO ANY OTHER PARTY WITHOUT THE WRITTEN CONSENT OF NORIX GROUP, INC. IT SHALL BE USED ONLY IN CONNECTION WITH THE WORK UNDER THE PROPOSALS OF PURCHASE ORDER SUBMITTED BY NORIX GROUP, INC. COPYRIGHT 2010 | UNLESS OTHERWISE SPECIFIED<br>STEEL<br>.XX = ± .125<br>.XXX = ± .060<br>ANGLES = ± 2° | 304SS 12GA (.1046") (BODY)<br>ASTM A1011-CS 12GA (.1046") (FACEPLATE FRAME)<br>304SS 14GA (.0747") (SEAT/FACEPLATE)<br>ASTM A513, TYPE 1, HR, EW, Ø3.0" X 14GA (LEG)<br>POLYCARBONATE SHEET | POWDER COAT WHEEL SILVER (FACEPLATE FRAME)<br>POWDER COAT BLACK (BODY) (LEG ONLY) |
|     |         |                     |     |      |   | INTELESTION, FLOORMOUNT, FREE STANDING, ENCLOSED STYLE 304SS                          |   |   |
|     |         |                     |     |      |   | DRAWING NUMBER  |   |   |
|     |         |                     |     |      |   | SEF7S-SST   |   |   |
|     |         |                     |     |      |   | DRAWING TYPE  |   |   |
|     |         |                     |     |      |   | CUSTOMER  |   |   |
|     |         |                     |     |      |   | DATE DRAWN  |   |   |
|     |         |                     |     |      |   | 5/28/2013   |   |   |
|     |         |                     |     |      |   | SHEET   |   |   |
|     |         |                     |     |      |   | 2 OF 2  |   |   |

EXHIBIT 2-PAGE 3

1870

1871

1872

1873

1874

1875

1876

1877

1878

1879

1880

1881

1882

1883

1884

1885

1886

1887

1888

1889

1890

1891

1892

1893

1894

1895

1896

1897

1898

1899

1900

1901

1902

1903

1904

1905

1906

1907

1908

1909

1910

1911

1912

1913

1914

1915

1916

1917

1918

1919

1920

1921

1922

1923

1924

1925

1926

1927

1928

1929

1930

1931

1932

1933

1934

1935

1936

1937

1938

1939

1940

1941

1942

1943

1944

1945

1946

1947

1948

1949

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963

1964

1965

1966

1967

1968

1969

1970

1971

1972

1973

1974

1975

1976

1977

1978

1979

1980

1981

1982

1983

1984

1985

1986

1987

1988

1989

1990

1991

1992

1993

1994

1995

1996

1997

1998

1999

2000

2001

2002

2003

2004

2005

2006

2007

2008

2009

2010

2011

2012

2013

2014

2015

2016

2017

2018

2019

2020

2021

2022

2023

2024

2025

2026

2027

2028

2029

2030

2031

2032

2033

2034

2035

2036

2037

2038

2039

2040

2041

2042

2043

2044

2045

2046

2047

2048

2049

2050

2051

2052

2053

2054

2055

2056

2057

2058

2059

2060

2061

2062

2063

2064

2065

2066

2067

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

2117

2118

2119

2120

2121

2122

2123

2124

2125

2126

2127

2128

2129

2130

2131

2132

2133

2134

2135

2136

2137

2138

2139

2140

2141

2142

2143

2144

2145

2146

2147

2148

2149

2150

2151

2152

2153

2154

2155

2156

2157

2158

2159

2160

2161

2162

2163

2164

2165

2166

2167

2168

2169

2170

2171

2172

2173

2174

2175

2176

2177

2178

2179

2180

2181

2182

2183

2184

2185

2186

2187

2188

2189

2190

2191

2192

2193

2194

2195

2196

2197

2198

2199

2200

2201

2202

2203

2204

2205

2206

2207

2208

2209

2210

2211

2212

2213

2214

2215

2216

2217

2218

2219

2220

2221

2222

2223

2224

2225

2226

2227

2228

2229

2230

2231

2232

2233

2234

2235

2236

2237

2238

2239

2240

2241

2242

2243

2244

2245

2246

2247

2248

2249

2250

2251

2252

2253

2254

2255

2256

2257

2258

2259

2260

2261

2262

2263

2264

2265

2266

2267

2268

2269

2270

2271

2272

2273

2274

2275

2276

2277

2278

2279

2280

2281

2282

2283

2284

2285

2286

2287

2288

2289

2290

2291

2292

2293

2294

2295

2296

2297

2298

2299

2300

2301

2302

2303

2304

2305

2306

2307

2308

2309

2310

2311

2312

2313

2314

2315

2316

2317

2318

2319

2320

2321

[illegible]





EXHIBIT 2-PAGES

**THE UNIVERSITY OF CHICAGO**

|     |         |    |  |
|-----|---------|----|--|
| REV | DATE    | BY | DESCRIPTION  |
| A   | 2/24/91 |    | UPGRADE DRAWING TO 3-D SCALE. REMOVED ALL DIMENSIONS |
| B   |         |    |  |
| C   |         |    |  |
| D   |         |    |  |
| E   |         |    |  |
| F   |         |    |  |
| G   |         |    |  |
| H   |         |    |  |
| I   |         |    |  |
| J   |         |    |  |
| K   |         |    |  |
| L   |         |    |  |
| M   |         |    |  |
| N   |         |    |  |
| O   |         |    |  |
| P   |         |    |  |
| Q   |         |    |  |
| R   |         |    |  |
| S   |         |    |  |
| T   |         |    |  |
| U   |         |    |  |
| V   |         |    |  |
| W   |         |    |  |
| X   |         |    |  |
| Y   |         |    |  |
| Z   |         |    |  |
| AA  |         |    |  |
| AB  |         |    |  |
| AC  |         |    |  |
| AD  |         |    |  |
| AE  |         |    |  |
| AF  |         |    |  |
| AG  |         |    |  |
| AH  |         |    |  |
| AI  |         |    |  |
| AJ  |         |    |  |
| AK  |         |    |  |
| AL  |         |    |  |
| AM  |         |    |  |
| AN  |         |    |  |
| AO  |         |    |  |
| AP  |         |    |  |
| AQ  |         |    |  |
| AR  |         |    |  |
| AS  |         |    |  |
| AT  |         |    |  |
| AU  |         |    |  |
| AV  |         |    |  |
| AW  |         |    |  |
| AX  |         |    |  |
| AY  |         |    |  |
| AZ  |         |    |  |
| BA  |         |    |  |
| BB  |         |    |  |
| BC  |         |    |  |
| BD  |         |    |  |
| BE  |         |    |  |
| BF  |         |    |  |
| BG  |         |    |  |
| BH  |         |    |  |
| BI  |         |    |  |
| BJ  |         |    |  |
| BK  |         |    |  |
| BL  |         |    |  |
| BM  |         |    |  |
| BN  |         |    |  |
| BO  |         |    |  |
| BP  |         |    |  |
| BQ  |         |    |  |
| BR  |         |    |  |
| BS  |         |    |  |
| BT  |         |    |  |
| BU  |         |    |  |
| BV  |         |    |  |
| BW  |         |    |  |
| BX  |         |    |  |
| BY  |         |    |  |
| BZ  |         |    |  |
| CA  |         |    |  |
| CB  |         |    |  |
| CC  |         |    |  |
| CD  |         |    |  |
| CE  |         |    |  |
| CF  |         |    |  |
| CG  |         |    |  |
| CH  |         |    |  |
| CI  |         |    |  |
| CJ  |         |    |  |
| CK  |         |    |  |
| CL  |         |    |  |
| CM  |         |    |  |
| CN  |         |    |  |
| CO  |         |    |  |
| CP  |         |    |  |
| CQ  |         |    |  |
| CR  |         |    |  |
| CS  |         |    |  |
| CT  |         |    |  |
| CU  |         |    |  |
| CV  |         |    |  |
| CW  |         |    |  |
| CX  |         |    |  |
| CY  |         |    |  |
| CZ  |         |    |  |
| DA  |         |    |  |
| DB  |         |    |  |
| DC  |         |    |  |
| DD  |         |    |  |
| DE  |         |    |  |
| DF  |         |    |  |
| DG  |         |    |  |
| DH  |         |    |  |
| DI  |         |    |  |
| DJ  |         |    |  |
| DK  |         |    |  |
| DL  |         |    |  |
| DM  |         |    |  |
| DN  |         |    |  |
| DO  |         |    |  |
| DP  |         |    |  |
| DQ  |         |    |  |
| DR  |         |    |  |
| DS  |         |    |  |
| DT  |         |    |  |
| DU  |         |    |  |
| DV  |         |    |  |
| DW  |         |    |  |
| DX  |         |    |  |
| DY  |         |    |  |
| DZ  |         |    |  |
| EA  |         |    |  |
| EB  |         |    |  |
| EC  |         |    |  |
| ED  |         |    |  |
| EE  |         |    |  |
| EF  |         |    |  |
| EG  |         |    |  |
| EH  |         |    |  |
| EI  |         |    |  |
| EJ  |         |    |  |

EXHIBIT 2-PAGE 6

**THE DIMENSIONS SHOWN ARE FOR REFERENCE ONLY**

| REV | DATE    | DESCRIPTION                                    | REV   | DATE | DESCRIPTION |
|-----|---------|--|---|------|-------------|
| A   | 8/9/16  | RELEASE NEW DRAWING                            | <p><b>DO NOT SCALE DRAWING</b></p> <p>THIS DRAWING IS THE PROPERTY OF HANSON GROUP, INC. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN CONSENT OF HANSON GROUP, INC. THIS DRAWING IS TO BE USED ONLY FOR THE PROJECT SPECIFICALLY IDENTIFIED ON THE DRAWING. ANY OTHER USE IS STRICTLY PROHIBITED. VIOLATION OF THIS NOTICE MAY RESULT IN LEGAL ACTION.</p> <p><b>INTENTION: WALL MOUNT, ENCLOSED STYLE 30ASS, SINGLE POSITION WITH SST SEAT</b></p> <p><b>EXAMINE DIMENSIONS</b></p> <p><b>SEW7S-SST</b></p> |      |             |
| B   | 2/16/17 | UPDATE DRAWING TO SIZE, REMOVED ACOUSTIC HOLES |   |      |             |

LEGS TO BE METALLIC SILVER

Exhibit 2-Page 7

[illegible]

EXHIBIT 2-PAGE 8

[illegible]



Exhibit 2- Page 10

[illegible]

██████████ EQUIPMENT TO BE PROVIDED:

- 3 Video Visitation Systems to be wall mounted in housing provided by VENDOR (VV)
- 3 Inmate Telephone Systems to be wall mounted (IMS)

██████████ EQUIPMENT TO BE PROVIDED:

- 5 Video Visitation Systems to be wall mounted in housing provided by VENDOR (VV)
- 9 Video Visitation Systems to be counter top mounted in housing provided by VENDOR (VV)
- 17 Inmate Telephone Systems to be wall mounted (IMS)
- 6 Inmate Non-Contact Telephone Systems (face-to-face) to be wall mounted (P1)
- All necessary switches and ancillary equipment to be installed in Phone Office (shown in orange)